



Body Style: Five-door compact car

Layout: Transverse front engine, FWD

Seat Layout: 2/3

EPA Vehicle Class: Compact car

Assembly: Belvidere, Ill.

2010 DODGE CALIBER—EFFICIENT FIVE-DOOR PACKAGE WITH ALL-NEW INTERIOR

Dodge Caliber is a five-door vehicle that combines a sporty coupe-like profile with the strength, stance and functionality of an SUV. Combining five-star safety ratings, technology, value, bold styling and an all-new interior design, the 2010 Dodge Caliber stands out in one of the world's most competitive segments.

The 2010 Dodge Caliber features an all-new redesigned interior, including a new instrument panel with a center storage bin, bright accents, a center console with a padded armrest split-lid for added storage space, and soft-touch door-trim panels. The all-new instrument panel features a smooth design aesthetic while chromed accents brighten new heating, ventilation and air conditioning (HVAC) vents, shift bezel, and cluster rings. LED-illuminated cup holders make it easier to place beverages in the right spot at night.

Two World Engine offerings (2.0- and 2.4-liter) provide class-leading horsepower (158 and 172, respectively). Chrysler World Engines feature dual Variable-valve Timing (VVT) and an intake manifold design with flow control valves, both firsts for a Chrysler compact car and typically found only on more expensive vehicles. Combined, these features produce more power, better fuel economy and a smoother, quieter operation than engines without them.

In addition, the 2010 Dodge Caliber is chock full of interior features rarely found on entry-level compact vehicles, including Chill Zone™ cooled-beverage storage bin, 115-volt power outlet, rechargeable LED flashlight and an available MusicGate Power™ Sound Group including two articulating speakers packaged in the liftgate that swing down for tailgating and other activities.

NEW FOR 2010

- All-new interior
- New instrument panel with center storage bin, bright trim accents and chromed HVAC vents and gauge cluster rings (all models)
- New vinyl-wrapped and padded, soft-touch door-trim panels and center console armrest (all models)
- Driver and front-passenger active head restraints (all models)
- Five-speed manual transmission with 2.0-liter World Engine (standard on Caliber SE and SXT)
- Sport Appearance package includes new 18-inch polished aluminum wheels, performance suspension and steering (available on Caliber SXT)

SAFETY AND SECURITY

More than 30 safety and security features including:

- Advanced Multi-stage Air Bags
- Supplemental Side Air Bags
- Electronic Stability Control (ESC)
- Hill-start Assist (HSA) (manual transmission)


FUEL ECONOMY (city/hwy)

2.0L DOHC I-4	2.4L DOHC I-4
23/31 (Est.) – FWD man.	23/29 – FWD man.
23/27 – FWD CVT2	21/25 – FWD CVT2

MODELS / POWERTRAINS

MODEL	ENGINES		TRANSMISSIONS		
	2.0L I-4	2.4L I-4	5-SPEED MANUAL (T355)	CVT2 (Jatco)	CVT2 W/ AUTO STICK (Jatco)
SE	S	–	S	0	–
SXT	S	–	S	0	–
R/T	–	S	S	–	0

DIMENSIONS, IN. (MM)

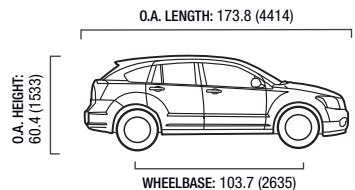

O.A. Width: 68.8 (1747)	Curb Wt. lb.(kg):
Track, Front: 59.8 (1520)	SE: 2,940 (1334)
Track, Rear: 59.8 (1520)	SXT: 3,012 (1366)
	R/T: 3,104 (1408)

2010 DODGE CALIBER AT A GLANCE

High value, bold styling

- Dodge Caliber redefines the compact, entry-level vehicle by combining high value with bold styling and efficient, flexible attributes consistent with active lifestyles
- Caliber's designed to appeal to global markets

All-new interior design

- New instrument panel, door-trim panels and center console
- Soft-touch padded door armrest and center console with split lid for added storage space
- Chromed accents on HVAC vents, shift bezel, instrument panel, door spears and cluster rings
- Available MusicGate Power Sound System, a nine-speaker Boston Acoustics premium sound system with rear articulating speakers
- Available Chill Zone cooled-beverage storage bin
- Available, removable- and rechargeable cargo light
- LED illuminated cup holder rings
- Available 115-volt power outlet in the center console
- Standard 60/40 split fold-flat rear seats with available recline feature
- Available fold-flat front-passenger seat

A small car that acts big

- Dodge Caliber appeals to buyers looking for a compact car that stands out from the crowd and gives them the flexibility to do more in terms of seating friends and storing gear
- Dodge Caliber is a five-door vehicle that combines a sporty coupe-like profile with the strength, stance and functionality of an SUV
- The Dodge Caliber's unconventional two-box design provides space-efficient packaging with great proportions, while offering high value
- Dodge Caliber's high H-point gives drivers a command-of-the-road seating position

Standard safety features

- Side-curtain air bags
- Driver and front-passenger multi-stage air bags
- Inflatable knee blocker
- Driver and front-passenger active head restraints

2010 DODGE CALIBER SPECIFICATIONS

Dimensions are in inches (millimeters) at curb weight with standard wheels and tires unless otherwise noted.

GENERAL INFORMATION

Body Style	Five-door compact car
Assembly Plant	Belvidere, Illinois
EPA Vehicle Class	Compact car
Introduction Date	January 2006, as 2007 model

ENGINE: 2.0-LITER DOHC 16-VALVE I-4 WITH DUAL VVT

Availability	Standard on Caliber SE and SXT
Type and Description	Four cylinders inline, tuned intake manifold with electronic Active Charge Motion Control valves, dual counter-rotating balance shafts
Displacement	121.9 cu. in. (1998 cu cm)
Bore x Stroke	3.39 x 3.39 (86 x 86)
Valve System	Chain-driven DOHC, 16 valves, electronically controlled dual VVT, direct-acting shimless mechanical bucket tappets
Fuel Injection	Sequential, multi-port, electronic, returnless
Construction	High-pressure die-cast aluminum block with dry iron liners, cast-aluminum cylinder head, cast-aluminum ladder frame, forged steel crankshaft
Compression Ratio	10.5:1
Power (SAE net, estimated)	158 bhp (118 kW) @ 6,400 rpm (79 bhp/liter)
Torque (SAE net, estimated)	141 lb.-ft. (191 N•m) @ 5,000 rpm
Max. Engine Speed	6,750 rpm (electronically limited)
Fuel Requirement	Unleaded regular, 87 octane (R+M)/2
Oil Capacity	5.0 qt. (4.7L) SAE 5W/20
Coolant Capacity	7.2 qt. (6.8L)
Emission Controls	Single catalytic converter, dual heated oxygen sensors and engine features
Smog-forming Pollution	0.9 g/mile (0.56 g/km) ^(a)
Max. Gross Trailer Weight	1,000 lbs. (450 kg) std., 1,500 lbs. (680 kg) with Security Group
Estimated 2010 EPA Fuel Economy mpg (City/Hwy)	23/31 (est.)—FWD with five speed manual transaxle 23/27—FWD CVT

^(a) NMOG + NOx emission limits under ULEV II and Tier 2, Bin 5 emission requirements.

ENGINE: 2.4-LITER DOHC 16-VALVE I-4 WITH DUAL VVT

Availability	Standard on Caliber R/T
Type and Description	Four cylinders inline, tuned intake manifold with electronic Active Charge Motion Control valves dual counter-rotating balance shafts
Displacement	144 cu. in. (2360 cu cm)
Bore x Stroke	3.46 x 3.82 (88 x 97)
Valve System	Chain-driven DOHC, 16 valves, electronically controlled dual VVT, direct-acting shimless mechanical bucket tappets
Fuel Injection	Sequential, multi-port, electronic, returnless
Construction	High-pressure die-cast aluminum block with dry iron liners, cast-aluminum cylinder head, cast-aluminum ladder frame, forged steel crankshaft
Compression Ratio	10.5:1
Power (SAE net, estimated)	172 bhp (128 kW) @ 6,000 rpm (72 bhp/liter)
Torque (SAE net, estimated)	165 lb.-ft. (224 N•m) @ 4,400 rpm
Max. Engine Speed	6,500 rpm (electronically limited)
Fuel Requirement	Unleaded regular, 87 octane (R+M)/2

2010 DODGE CALIBER SPECIFICATIONS

Oil Capacity	5.0 qt. (4.7L) SAE 5W/20
Coolant Capacity	7.2 qt. (6.8L)
Emission Controls	Single catalytic converter Dual heated oxygen sensors and engine features
Smog-forming Pollution	0.9 g/mile (0.56 g/km) ^(a)
Max. Gross Trailer Weight	1,000 lbs. (450 kg)/2,000 lbs. (900 kg) with Security Group
Estimated 2010 EPA Fuel Economy mpg (City/Hwy)	23/29—with five-speed manual transaxle 21/25—with CVT2

^(a) NMOG + NOx emission limits under ULEV II and Tier 2, Bin 5 emission requirements.

TRANSAXLE: MANUAL, MAGNA DRIVELINE T355 5-SPEED

Availability	Standard on Caliber SE and SXT with 2.0L and R/T 2.4L
Description	Five-speed, overdrive, synchronized in all forward ratios, cable-operated, three-plane shifter
Gear Ratios	
1st	3.77
2nd	2.16
3rd	1.41
4th	1.026
5th	0.81 (0.72 for 2.4L)
Reverse	3.417
Final-drive Ratio	4.12
Overall Top-gear	3.34

TRANSAXLE: AUTOMATIC, CVT2

Availability	Available with 2.0L and 2.4L
Description	Continuously variable ratio, lockup torque converter, electronic controls
Gear Ratios	
Forward	2.349:1 to 0.394:1 continuously variable
Reverse	1.762:1
Final-drive Ratio	6.12:1
Overall Top-gear Ratio	2.41:1

DRIVETRAIN

Front-wheel Drive	
Availability	Standard

ELECTRICAL SYSTEM

Alternator	120-amp
Battery	525 CCA, maintenance-free

2010 DODGE CALIBER SPECIFICATIONS

DIMENSIONS AND CAPACITIES^(a)

Wheelbase	103.7 (2635)
Track, Front	59.8 (1520)
Track, Rear	59.8 (1520)
Overall Length	173.8 (4414)
Overall Width	68.8 (1747)
Overall Height	60.4 (1533)
Ground Clearance	7.67 (195)
Frontal Area, sq. ft. (sq m)	24.7 (2.29)
Drag Coefficient	0.375
Aero (CdA)	9.3
NAFTA Curb Weight, lb. (kg)—Est.	SE 2,940 (1334) SXT 3,012 (1366) R/T 3,104 (1408)
NAFTA Weight Distribution, percent F/R	58/42
Fuel Tank Capacity, gal. (L)	13.6 (51.5)

^(a) All dimensions measured at curb weight with standard tires

ACCOMMODATIONS

Seating Capacity, F/R	2/3
Front	
Head Room without Sun Roof	39.8 (1012)
Leg Room	41.8 (1062)
Shoulder Room	55.4 (1408)
Hip Room	52.2 (1325)
Seat Travel	Driver—10.2 (260), passenger—10.2 (260)
Recliner Angle Range	Driver—up to 88°, passenger—(76° fold flat/88° non-fold flat)
SAE Front Volume Index, cu. ft. (cu m)	53.3 (1.510)
Rear	
Head Room	38.9 (988)
Leg Room	35.7 (906)
Knee Clearance	0.7 (18.6)
Shoulder Room	53.4 (1356)
Hip Room	49.6 (1261)
SAE Rear Seat Volume Index, cu. ft. (cu m)	42.9 (1.2)
SAE Interior Volume, cu. ft. (cu m)	96.2 (2.7)
Cargo Volume Indexes	
Rear Seats Up, cu. ft. (cu m)	18.4 (0.5)
Rear Seats Folded, cu. ft. (cu m)	47.4 (1.3)
EPA Interior Volume Index, cu. ft. (cu m)	114.6 (3.2)
Trunk Lift-over Height	27.7 (703)

BODY

Layout	Transverse front-engine front-wheel drive
Construction	Unitized steel body

2010 DODGE CALIBER SPECIFICATIONS

SUSPENSION

Front	Independent MacPherson strut, coil spring over gas-charged shock absorbers and stabilizer bar—standard
Rear	Multi-link independent with coil springs, link-type stabilizer bar, gas-charged shock absorbers—standard

STEERING

Type	Rack-and-pinion with hydraulic power assist
Overall Ratio	16.6:1
Turning Diameter (curb-to-curb)	17-in. wheels and tires—35.6 ft. (10.8 m) 18-in. wheels and tires—37.2 ft. (11.3 m)
Steering Turns (lock-to-lock)	15- or 17-inch wheels and tires—2.88 18-inch wheels and tires—2.76

TIRES

Availability	Standard on Caliber SE
Size and Type	P205/70R15 All-season
Mfr. and Model	Dunlop SP50
Revs per Mile (km)	801 (497)

Availability	Standard on Caliber SXT
Size and Type	P215/60R17 BSW All-season Touring
Mfr. and Model	Firestone Affinity S3
Revs per Mile (km)	760 (472)

Availability	Standard on Caliber R/T, Optional on SXT (Sport Appearance Group)
Size and Type	P215/55R18 All-season Performance
Mfr. and Model	Firestone Firehawk GTA 03
Revs per Mile (km)	765 (476)

WHEELS

Availability	Standard on Caliber SE
Type and Material	Stamped steel with five-spoke wheel covers
Size	15 in. x 6.0 in.

Availability	Standard on Caliber SXT
Type and Material	Painted aluminum
Size	17 in. x 6.5 in.

Availability	Standard on Caliber R/T, Optional on SXT (Sport Appearance Group)
Type and Material	Polished Aluminum
Size	18 in. x 7.0 in.

Availability	Optional on Caliber R/T
Type and Material	Chrome-clad aluminum
Size	18 in. x 7.0 in.

2010 DODGE CALIBER SPECIFICATIONS

BRAKES

Availability	Standard on Caliber SE
Front	
Size and Type	10.8 x 1.0 (276 x 26) vented disc with 2.2 (57) single-piston floating caliper
Swept Area ^(a)	205 sq. in. (1325 sq cm)
Rear	
Size and Type	9.0 x 1.38 (229 x 35) drum
Swept Area	78 sq. in. (503 sq cm)
Power-assist Type	10 (254) single-vacuum diaphragm
Four-wheel Anti-lock Brake System (ABS)	Optional—Included with CVT2 transaxle
Availability	
Standard on Caliber SXT	
Front	
Size and Type	11.5 x 1.0 (294 x 26) vented disc with 2.2 (57) single-piston floating caliper
Swept Area	223 sq. in. (1442 sq cm)
Rear	
Size and Type	9.0 x 0.85 (229 x 35) drum
Swept Area	78 sq. in. (503 sq cm)
Power-assist Type	10 (254) single-vacuum diaphragm
Four-wheel Anti-lock Brake System (ABS)	Optional—Included with CVT2 transaxle
Availability	
Standard on Caliber R/T	
Front	
Size and Type	11.5 x 1.0 (294 x 26) vented disc with 2.2 (57) single-piston floating caliper
Swept Area	223 sq. in. (1442 sq cm)
Rear	
Size and Type	10.3 x 1.39 (262 x 10) solid disc with 1.4 (35) single-piston floating caliper
Swept Area	138 sq. in. (894 sq cm)
Power-assist Type	10 (254) single-diaphragm vacuum
Four-wheel Anti-lock Brake System (ABS)	Standard on Caliber R/T
Electronic Stability Control (ESC)	Optional on Caliber SXT and R/T
Hill-start Assist (HSA)	Standard with manual transmission and ESC

^(a) Note: Per axle.

2010 DODGE CALIBER FEATURE AVAILABILITY

LEGEND: S = Standard, O = Optional, P = Package, — = Not available

Complete package information is listed at the end of the Feature Availability section.

NOTE: Information shown is correct at time of publication and is subject to change.

	SE	SXT	R/T
EXTERIOR			
Badges			
Caliber badge	S	S	S
Dodge badge	S	S	S
Body-color liftgate appliqué	S	S	S
SXT badge	—	S	—
R/T badge	—	—	S
Black appliqué (included with Sport Appearance Group)	—	P	S
Colors			
Inferno Red Crystal Pearl Coat			
Bright Silver Metallic Clear Coat			
Brilliant Black Crystal Pearl Coat			
Stone White Clear Coat			
Sunburst Orange Pearl Coat			
Light Sandstone Metallic Clear Coat			
Optic Green Metallic			
Deep Water Blue Pearl Coat	O	O	O
Door Handles			
Black	S	—	—
Body-color	—	S	S
Fascias—Body-color	S	S	S
Exhaust Tip—Chromed	—	—	S
Fixed Long Mast Antenna	S	S	S
Grille			
Body-color grille	S	—	—
Chromed grille	—	S	S
Lamps			
Halogen headlamps	S	S	S
Fog lamps (included with Sport Appearance Group)	—	P	S
Daytime running lamps (included with Security Group)	—	P	P
Mirrors			
Manual	S	—	—
Power, heated	—	S	S
Moldings			
Chromed body-side	—	—	S
Rear Spoiler	S	S	S
Rear Window Defroster	S	S	S
Sun Roof—Power express-open/close	—	O	O
Windows			
Manual	S	—	—
Power windows with driver's one-touch down	—	S	S
Solar Control Glass	S	S	S
Wiper System			
Windshield, variable, intermittent	S	S	S
Rear window wiper/washer	S	S	S

2010 DODGE CALIBER FEATURE AVAILABILITY

	SE	SXT	R/T
INTERIOR			
Climate Control			
Air Conditioning	0	S	S
Cabin Filtration	S	S	S
Automatic temperature controls (late availability)	—	—	0
Interior Colors			
Dark Slate/Medium Graystone, Dark Slate Gray	0	0	0
Console			
Full-length floor	S	S	S
LED illuminated cup holders	S	S	S
12-volt auxiliary power outlet	S	S	S
115-volt auxiliary power outlet	—	S	S
Color-keyed PRNDL bezel (included with Sport Appearance Group)	—	P	S
Sliding armrest—Soft-touch with storage bin	S	S	S
Park brake handle—Leather-wrapped	—	—	S
Floor Covering			
Carpet	S	S	S
Carpet-covered washable and removable load floor covering	S	S	S
Floor Mats—Front and rear			
	S	S	S
HomeLink universal transceiver (included with Driver Convenience Group)			
	—	P	P
Instrument Cluster			
LED gauge cluster	S	S	S
120-mph primary speedometer	S	S	S
Outside temperature gauge	S	S	S
Electronic Vehicle Information Center (EVIC) (included with Driver Convenience Group)	—	P	P
Instrument Panel			
Chill Zone™ beverage storage cooler (included with air conditioning)	P	S	S
Satin Silver bezel	S	S	P
Color-keyed bezel	—	P	S
Lamps			
Front dome and cargo compartment	S	—	—
Map/dome reading lamps	—	S	S
Cargo compartment lamp and removable/rechargeable LED flashlight	—	S	S
Illuminated entry	—	S	S
Passenger Assist Handles			
	—	S	S
Mirrors			
Rearview day/night mirror	S	S	S
Rearview automatic-dimming mirror	—	P	P
Seats			
Premium cloth, with low-back front bucket seats	S	S	—
Premium cloth with color-keyed accents (included with Sport Appearance Package)	—	P	S
Fold-flat front-passenger seat	—	S	S
Heated front seats (included with Driver Convenience Group)	—	P	S
Leather-trimmed bucket seats (included with Leather Interior Group)	—	—	P
Manual driver height adjust	—	S	—
Power-adjust driver seat	—	—	S
Rear 60/40 split seat	S	—	—
Rear 60/40 split recline seat	—	S	S

2010 DODGE CALIBER FEATURE AVAILABILITY

	SE	SXT	R/T
Sound System			
AM/FM, CD with auxiliary audio input jack	S	S	—
AM/FM, 6-disc CD with auxiliary audio input jack	—	—	S
Uconnect™ Multimedia	—	0	0
Uconnect Navigation	—	—	P
SIRIUS Satellite Radio	—	S	S
Speakers			
Four speakers	S	S	—
MusicGate Power™ nine-speaker Boston Acoustics premium sound system, with subwoofer and two articulating liftgate speakers, includes leather-wrapped steering wheel with audio controls	—	P	S
Speed Control	—	S	S
Steering Column—Tilt	S	S	S
Steering Wheel—Leather-wrapped with steering wheel audio controls	—	P	S
Sun Visors—Sliding with mirrors	S	S	S
Tonneau Cover	—	S	S
Uconnect Phone^(a) (included with Security Group)	—	P	P
iPod® Control (included with Uconnect Phone)	—	P	P

^(a) Requires Bluetooth enabled mobile phone.

POWERTRAIN AND CHASSIS

Engines:

2.0-liter 4-cyl. DOHC 16V dual VVT	S	S	—
2.4-liter 4-cyl. DOHC 16V dual VVT	—	—	S

Transaxles

Five-speed manual T355	S	S	S
Continuously Variable Transaxle II (CVT2)	0	0	—
CVT2 with Auto Stick automatic	—	—	0
Tip Start (packaged with CVT2)	P	P	P

Brakes

Power front disc/rear drum	S	S	—
Front disc/rear drum Anti-lock Brake System (ABS)	—	S	—
Four-wheel disc Anti-lock Brake System (ABS) (included with Sport Appearance Group)	—	P	S
Brake Assist, packaged with Electronic Stability Control (ESC) (included with Sport Appearance Group and Security Group)	—	P	P

Engine Block Heater

	0	0	0
--	---	---	---

Fuel Tank

13.6 gal.	S	S	S
-----------	---	---	---

Steering

Power, rack-and-pinion	S	S	—
Performance-tuned power rack-and-pinion (included with Sport Appearance Group)	—	P	S

Suspension, four-wheel independent front, multi-link rear

Normal	S	—	—
Touring	—	S	—
Sport (included with Sport Appearance Group)	—	P	S

2010 DODGE CALIBER FEATURE AVAILABILITY

	SE	SXT	R/T
Tires^(a)			
P205/70R15 BSW All-season	S	—	—
P215/60R17 BSW All-season Touring	—	S	—
P215/55R18 BSW All-season Performance (included with Sport Appearance Group)	—	P	S
Compact spare	S	S	S
Wheels			
15-inch steel wheel with 15-inch silver painted wheel covers	S	—	—
17-inch painted aluminum wheels	—	S	—
18-inch polished aluminum wheels (included with Sport Appearance Group)	—	P	S
18-inch chrome-clad aluminum wheels	—	—	0

SAFETY AND SECURITY

Air Bags^(a)			
Advanced multi-stage front air bags	S	S	S
Driver-side inflatable knee bolster	S	S	S
Side-curtain air bags	S	S	S
Daytime running lamps (included with Security Group)	—	P	P
Electronic Stability Control (ESC) ^(b) (included with Security Group)	—	P	P
Head restraints—Active, driver and front-passenger	S	S	S
Locks			
Manual locks	S	—	—
Speed-sensitive power locks, includes liftgate	—	S	S
Child protection rear door locks	S	S	S
Power accessory delay	S	S	S
Remote keyless entry	—	S	S
Restraint systems			
Front: Three-point belts with shoulder belt height adjusters	S	S	S
Rear: Three-point belts for outboard and center seating positions	S	S	S
BeltAlert, cluster lamp remains lit until driver buckles up	S	S	S
LATCH (Lower Anchors and Tethers for CHildren)	S	S	S
Sentry Key [®] engine immobilizer	S	S	S
Tire-pressure Monitoring (TPM) with warning lamp	S	S	S
Tire-pressure Monitoring (TPM) with message display	—	P	P
HomeLink universal transceiver	—	P	P

^(a) Certified to the Federal Regulations that allow less forceful front air bags. Always sit properly in the seat with the seat belt fastened. Children 12 and under should always be in a back seat correctly using an infant or child restraint system or the seat belt positioned correctly for the child's age and weight.

^(b) No system, no matter how sophisticated, can repeal the laws of physics or overcome careless driving actions. Performance is limited by available traction, which snow, ice and other conditions can affect. When the Electronic Stability Control (ESC) warning lamp in the speedometer flashes, the driver needs to use less throttle and adapt speed and driving behavior to prevailing road conditions. Always drive carefully, consistent with conditions. Always wear your seat belt.

2010 DODGE CALIBER FEATURE AVAILABILITY

	SE	SXT	R/T
PACKAGES / EQUIPMENT GROUPS			
Leather Interior Group —Includes leather-trimmed bucket seats, satin silver instrument panel and PRNDL bezels and manual driver lumbar adjust	—	—	0
Driver Convenience Group —Includes automatic-dimming interior rearview mirror, compass and Electronic Vehicle Information Center (EVIC), HomeLink universal transceiver, Tire-pressure Monitoring (TPM) and Uconnect Phone (heated front seats also included on SXT models)	—	0	0
Premium Sound Group —Includes MusicGate Power nine-speaker Boston Acoustics premium sound system with subwoofer and two articulating liftgate speakers and leather-wrapped steering wheel with audio controls	—	0	—
Sport Appearance Group —Includes fog lamps, color-keyed instrument panel and PRNDL bezels, premium cloth seats with color-keyed accents, 18-inch polished aluminum wheels, P215/55R18 all-season performance tires, 4-wheel disc brakes, performance steering, sport suspension and fog lamps	—	0	—
Security Group —Includes Uconnect Phone, iPod® Control, security alarm, remote start (with CVT), daytime running lamps, Electronic Stability Control (ESC), engine oil cooler, trailer-tow wiring harness, supplemental front-seat side air bags, and Hill-start Assist (HSA) (with five-speed manual transmission)	—	0	—
Security Group —Includes security alarm, remote start (with CVT), daytime running lamps, Electronic Stability Control (ESC), engine oil cooler, trailer-tow wiring harness, supplemental front-seat side air bags, Uconnect Navigation, Uconnect Phone, iPod® Control, auto-dimming interior rearview mirror and Hill-start Assist (HSA) (with five-speed manual transmission)	—	—	0